


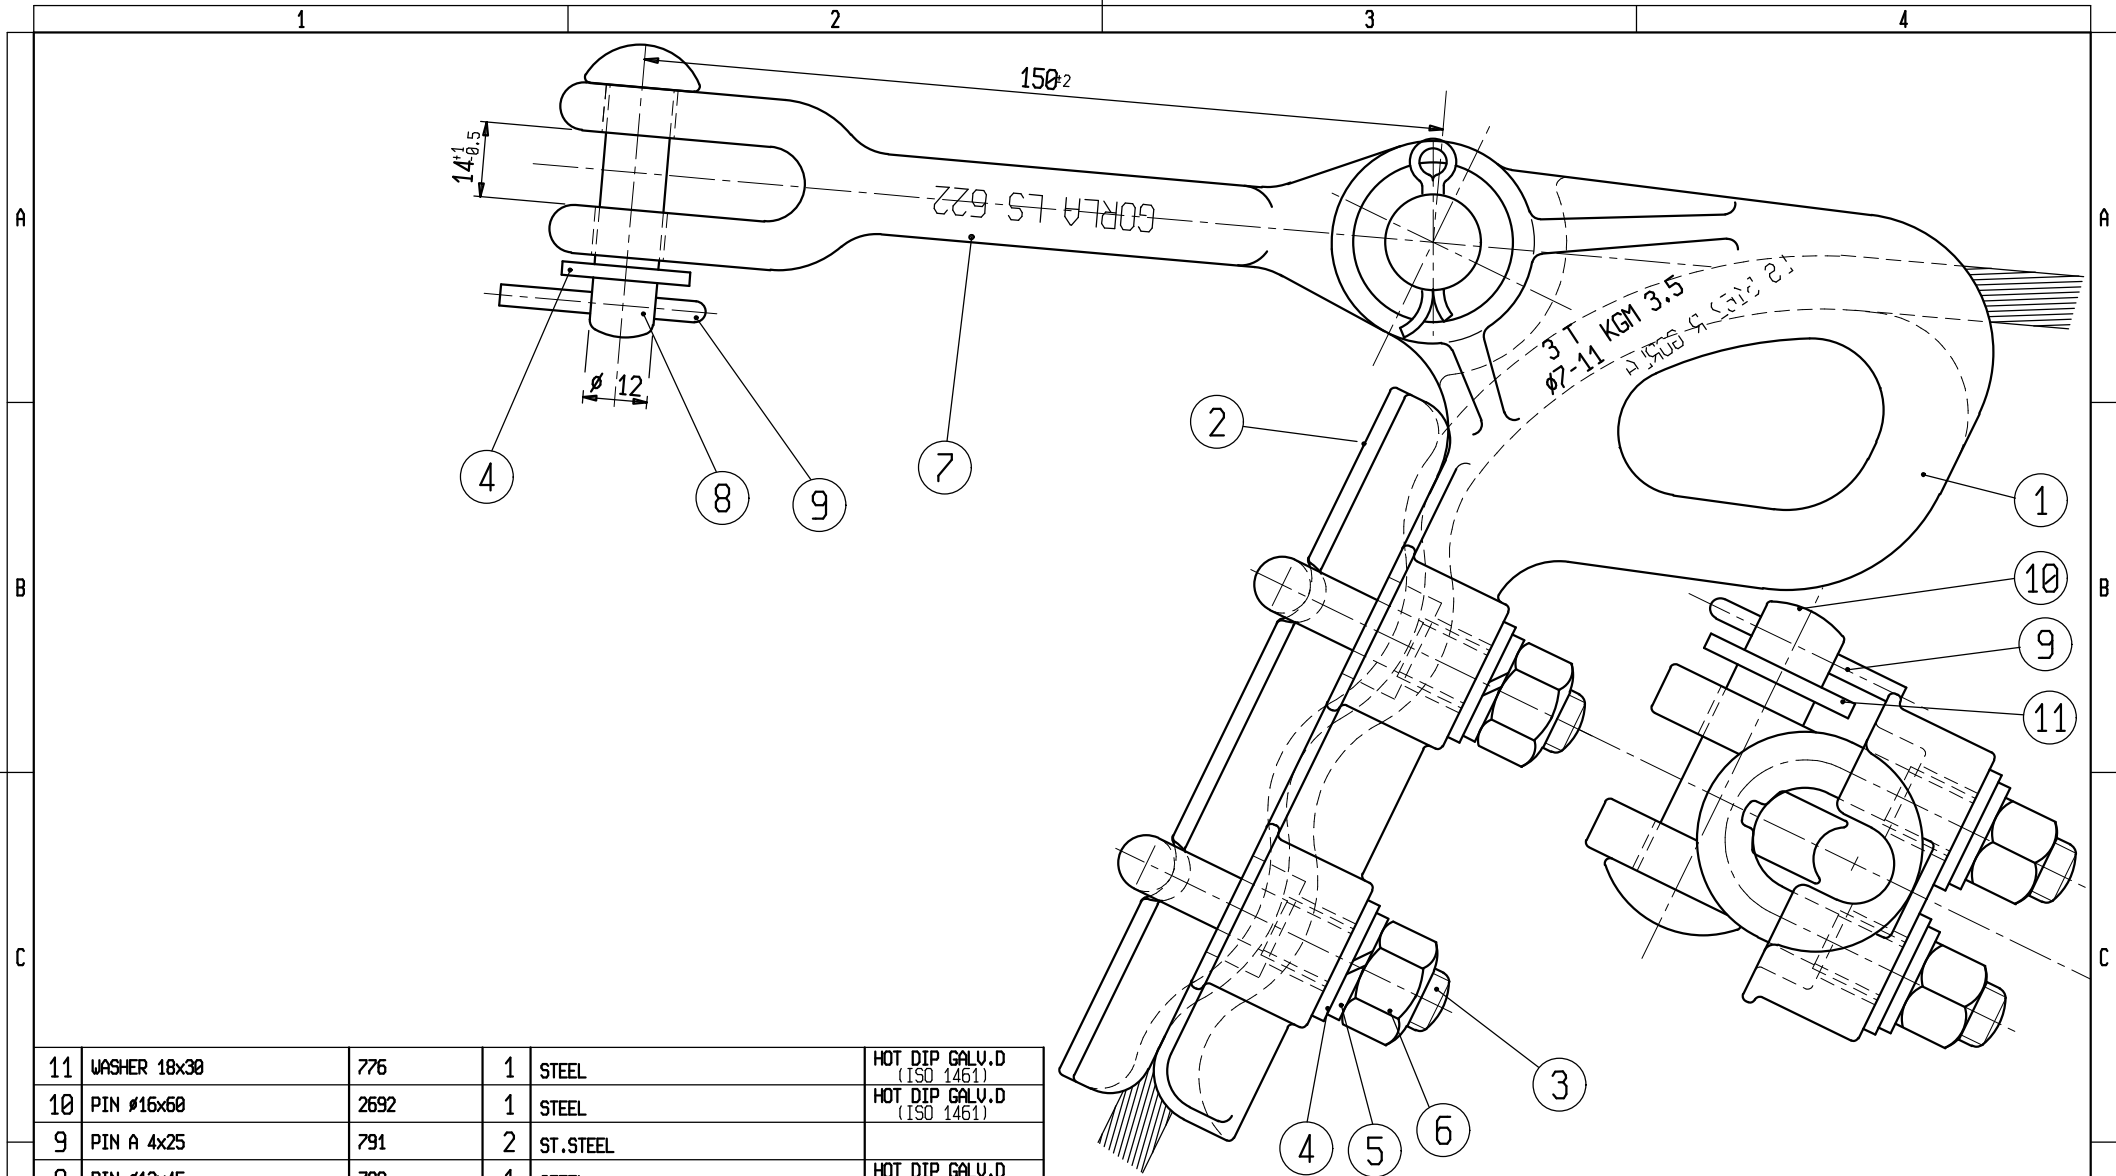

11	WASHER 18x30	776	1	STEEL	HOT DIP GALV.D (ISO 1461)
10	PIN Ø16x60	2692	1	STEEL	HOT DIP GALV.D (ISO 1461)
9	PIN A 4x25	791	2	ST.STEEL	
8	PIN Ø12x45	789	1	STEEL	HOT DIP GALV.D (ISO 1461)
7	EXTENSION LINK	LS 622 BIS	1	STEEL	HOT DIP GALV.D (ISO 1461)
6	NUT M12	3288	4	ST.STEEL	
5	SPRING WASHER A 13	4430	4	ST.STEEL	
4	WASHER 14x24	787	5	STEEL	HOT DIP GALV.D (ISO 1461)
3	U-BOLT M12x70	789	2	STEEL	HOT DIP GALV.D (ISO 1461)
2	KEEPER	LS 5167 R	1	Al ALLOY	
1	CLAMP	LS 5162 BIS R	1	Al ALLOY	
ITEM	DESCRIPTION	N° DRG.	N° PCS.	MATERIAL	NOTE


s.r.l. GORLA
MORSETTERIE
MILANO

TECHNICAL OFFICE



U-BOLT TENSION CLAMP
FOR ACSR, AAC AND AAAC
CONDUCTORS Ø 7- 11 mm
R = 3000 KG

Rev.1 dated 14.09.06

DRG. N.LS 5162 R



SECTION Y-Y

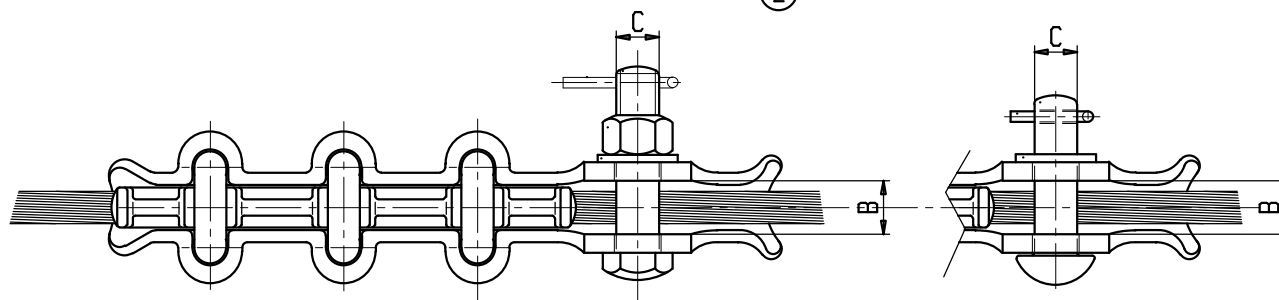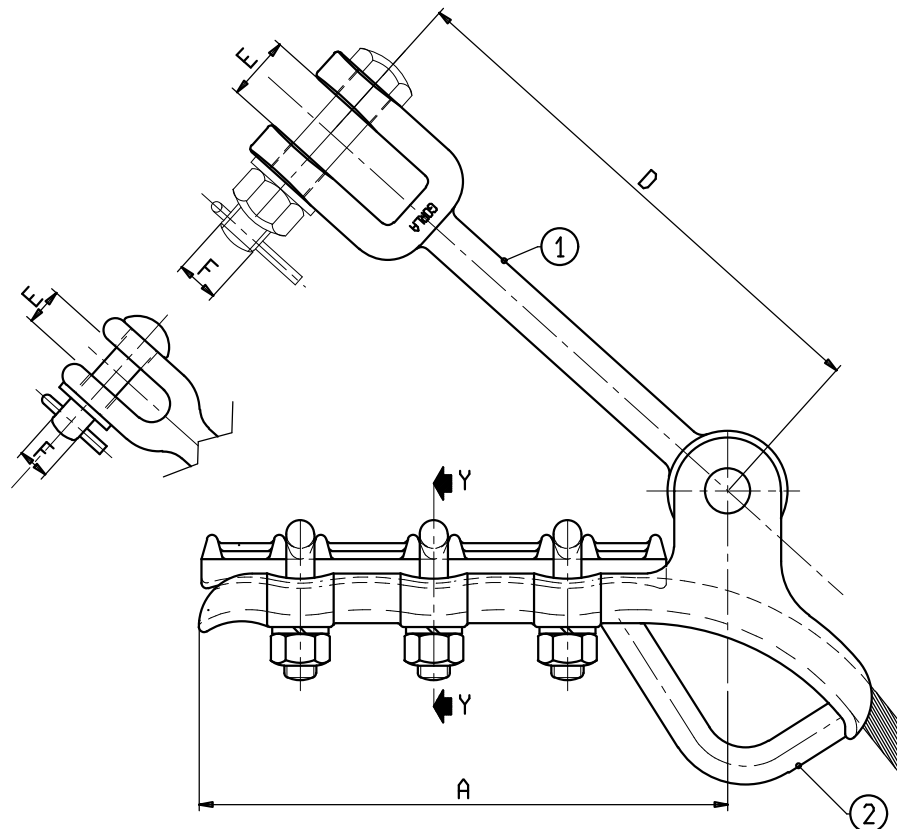

Material: Hot dip galvanized steel.

X	A	B	C	D	E	F	①	②	CR [kN]
LS 2511	200	24	M16	-	-	-	-	-	60
LS 2511MB	200	24	M16	-	-	-	-	LS6073	60
LS 2511M	200	24	Ø 16	-	-	-	-	LS6073	60

s.r.l. GORLA
MORSETTERIE
MILANO
TECHNICAL OFFICE

TENSION CLAMPS
WITH 3 U-BOLTS FOR
ACSR, AAC and AAAC CONDUCTORS
Ø 6 - 16,5 mm

SCALE	
DRAWN	DATE
APPROVED	DATE
DRG. N. AT41/A1/X	

