




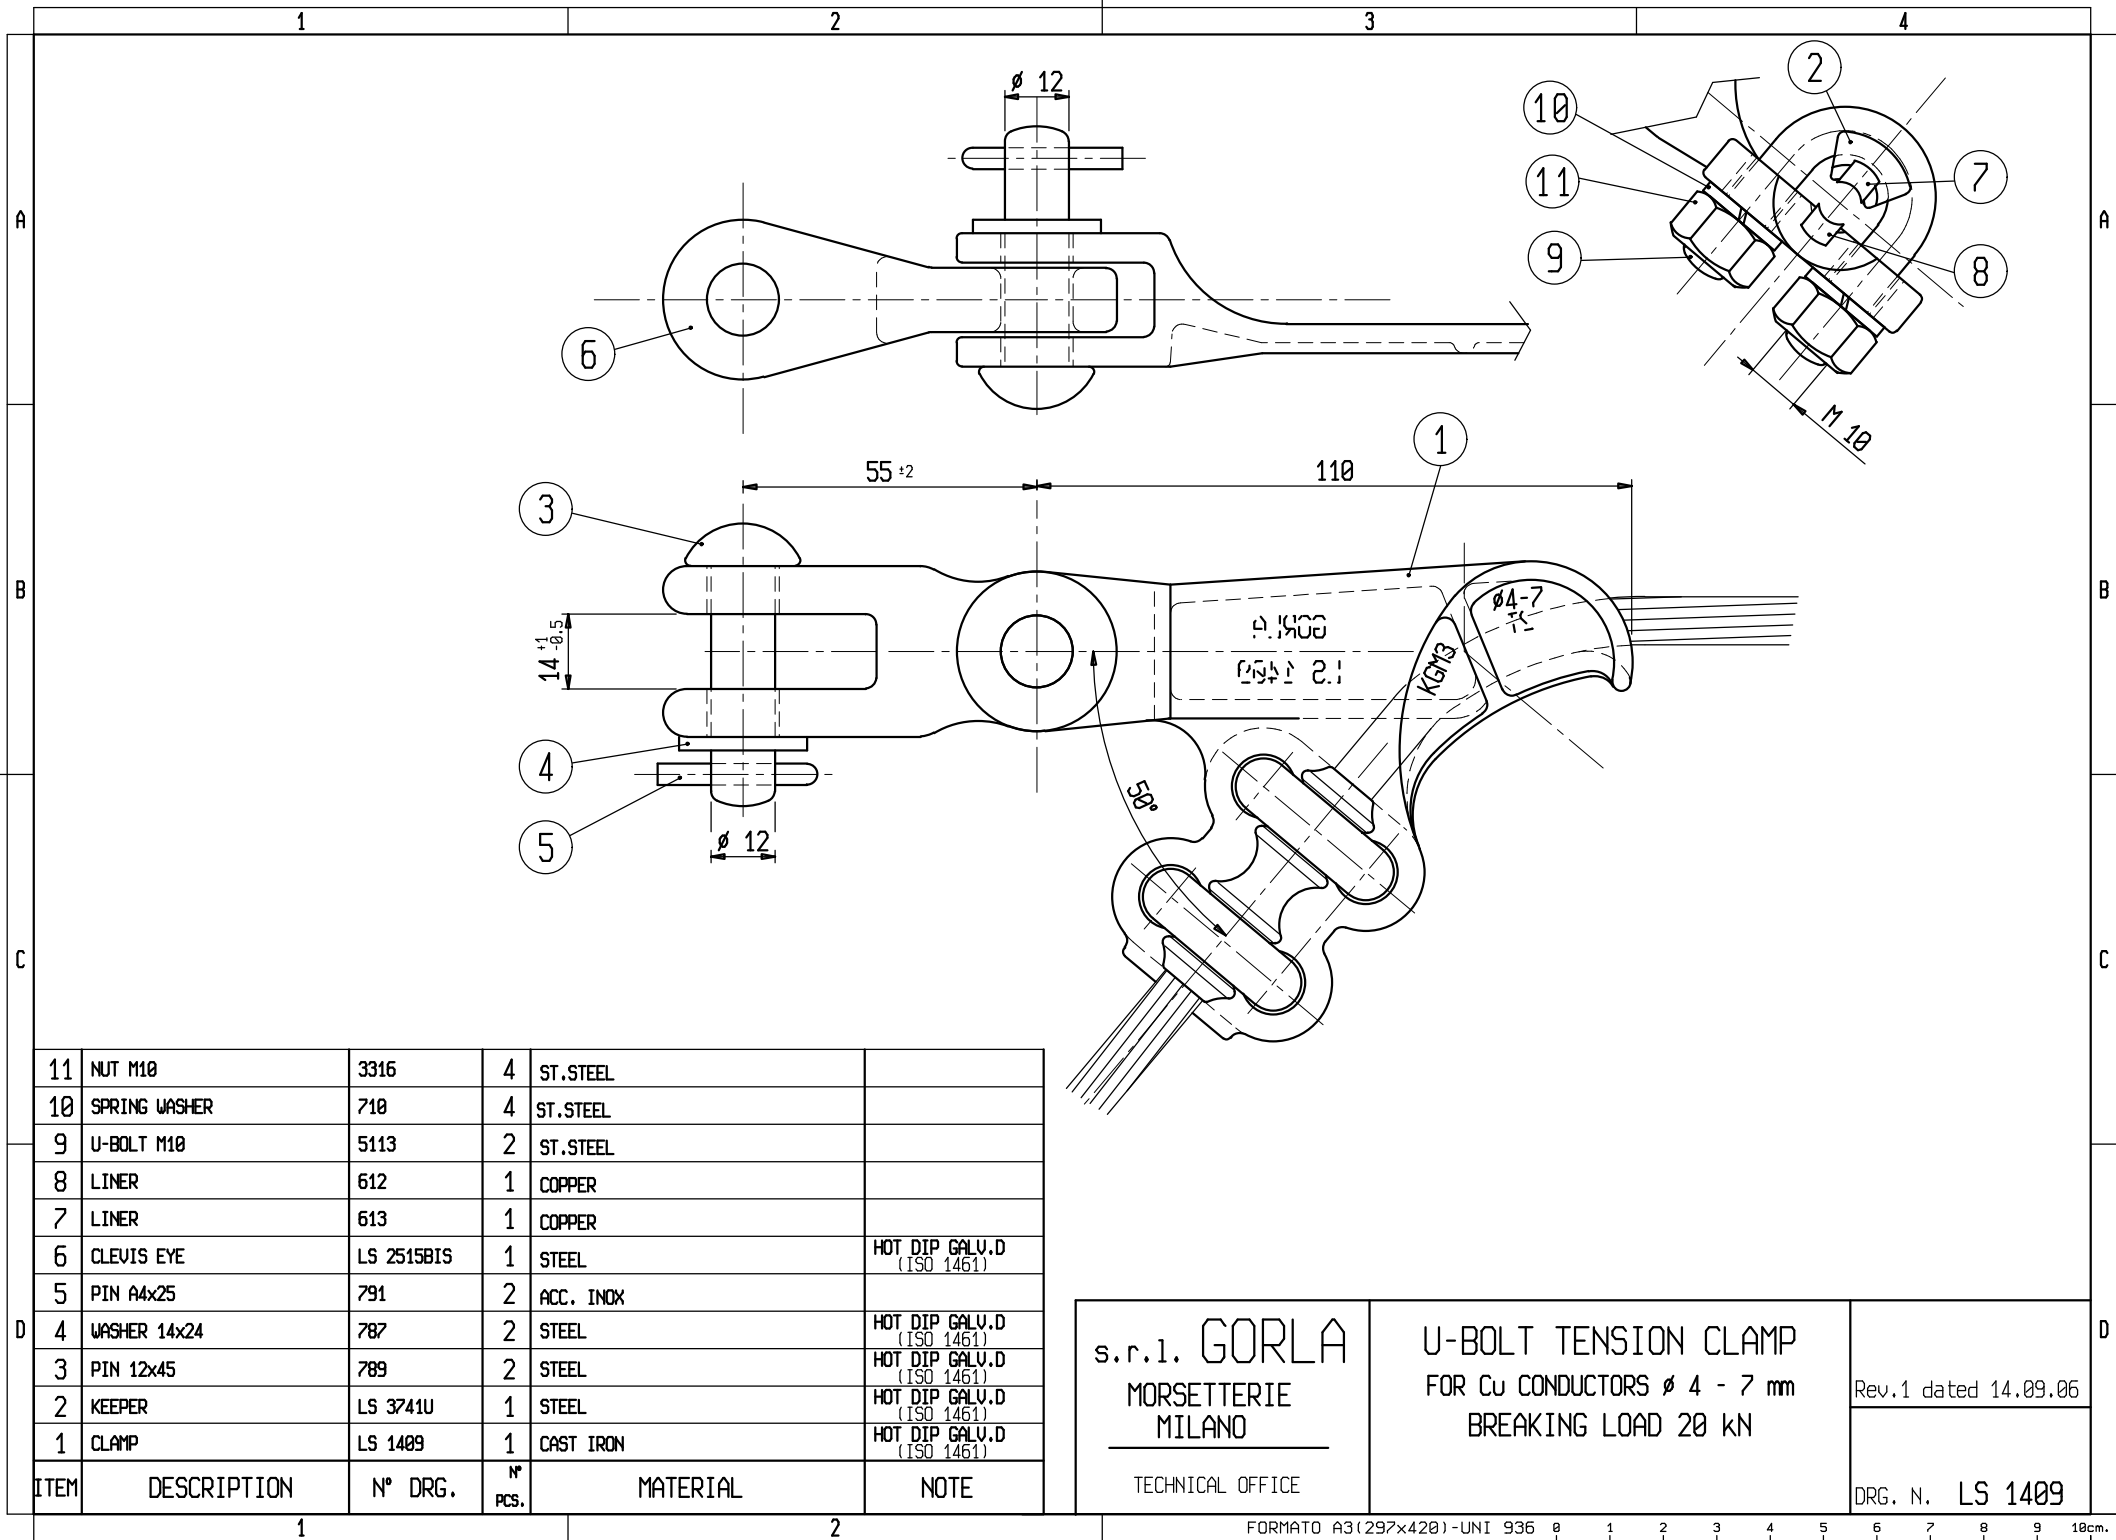


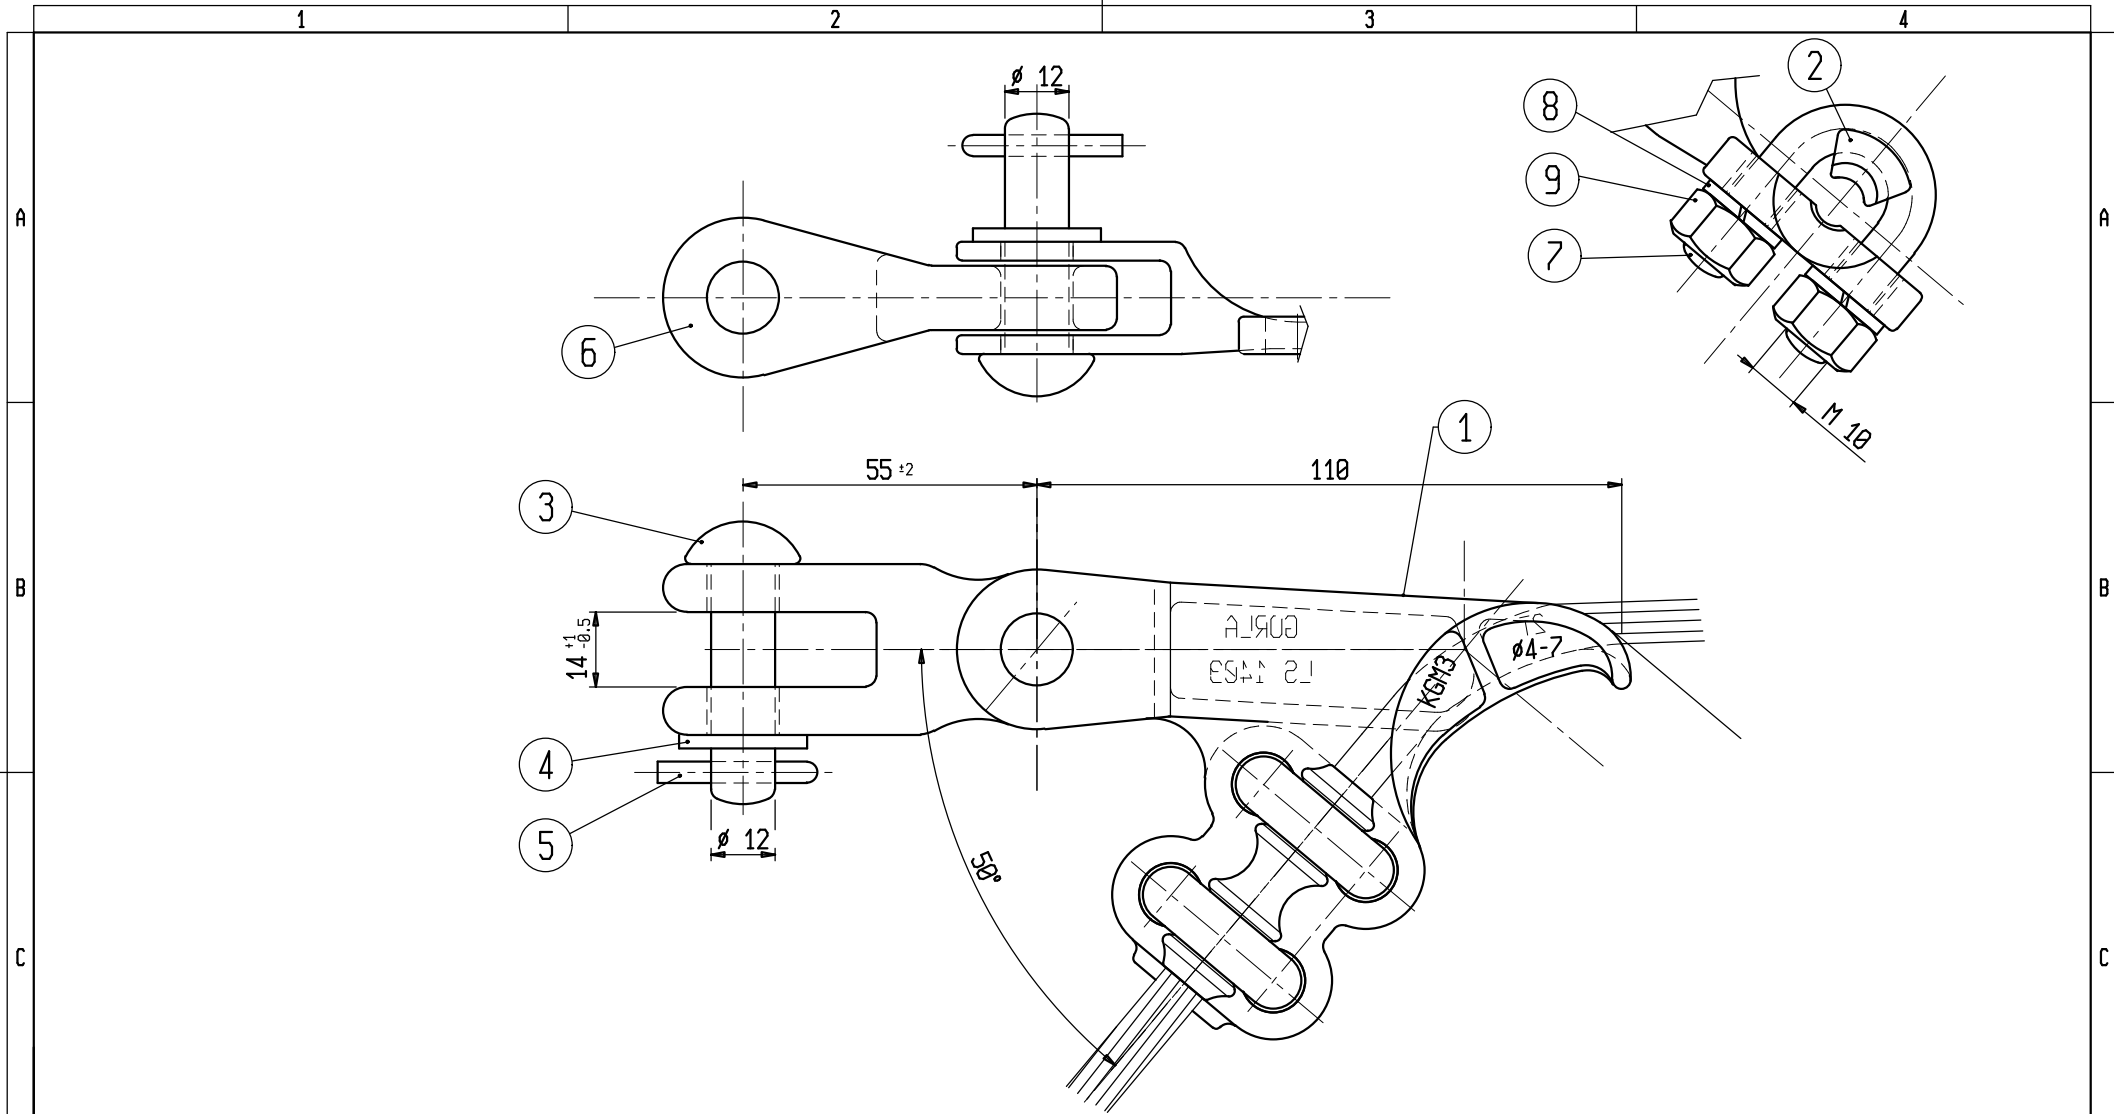

9	NUT M10	3316	4	ST.STEEL	
8	SPRING WASHER	710	4	ST.STEEL	
7	U-BOLT M10	5113	2	ST.STEEL	
6	CLEVIS EYE	LS 2515BIS	1	STEEL	HOT DIP GALV.D (ISO 1461)
5	PIN A4x25	791	2	ST.STEEL	
4	WASHER 13x24	5935	2	ST.STEEL	
3	PIN 12x45	789	2	STEEL	HOT DIP GALV.D (ISO 1461)
2	KEEPER	LS 3741UBR	1	CU ALLOY	
1	CLAMP	LS 1409 BB	1	CU ALLOY	
ITEM	DESCRIPTION	N° DRG.	N° PCS.	MATERIAL	NOTE

s.r.l. GORLA MORSETTERIE MILANO TECHNICAL OFFICE	U-BOLT TENSION CLAMP FOR Cu CONDUCTORS ϕ 4 - 7 mm BREAKING LOAD 20 kN	Rev.1 dated 14.09.06
		DRG. N. LS 1409 BR

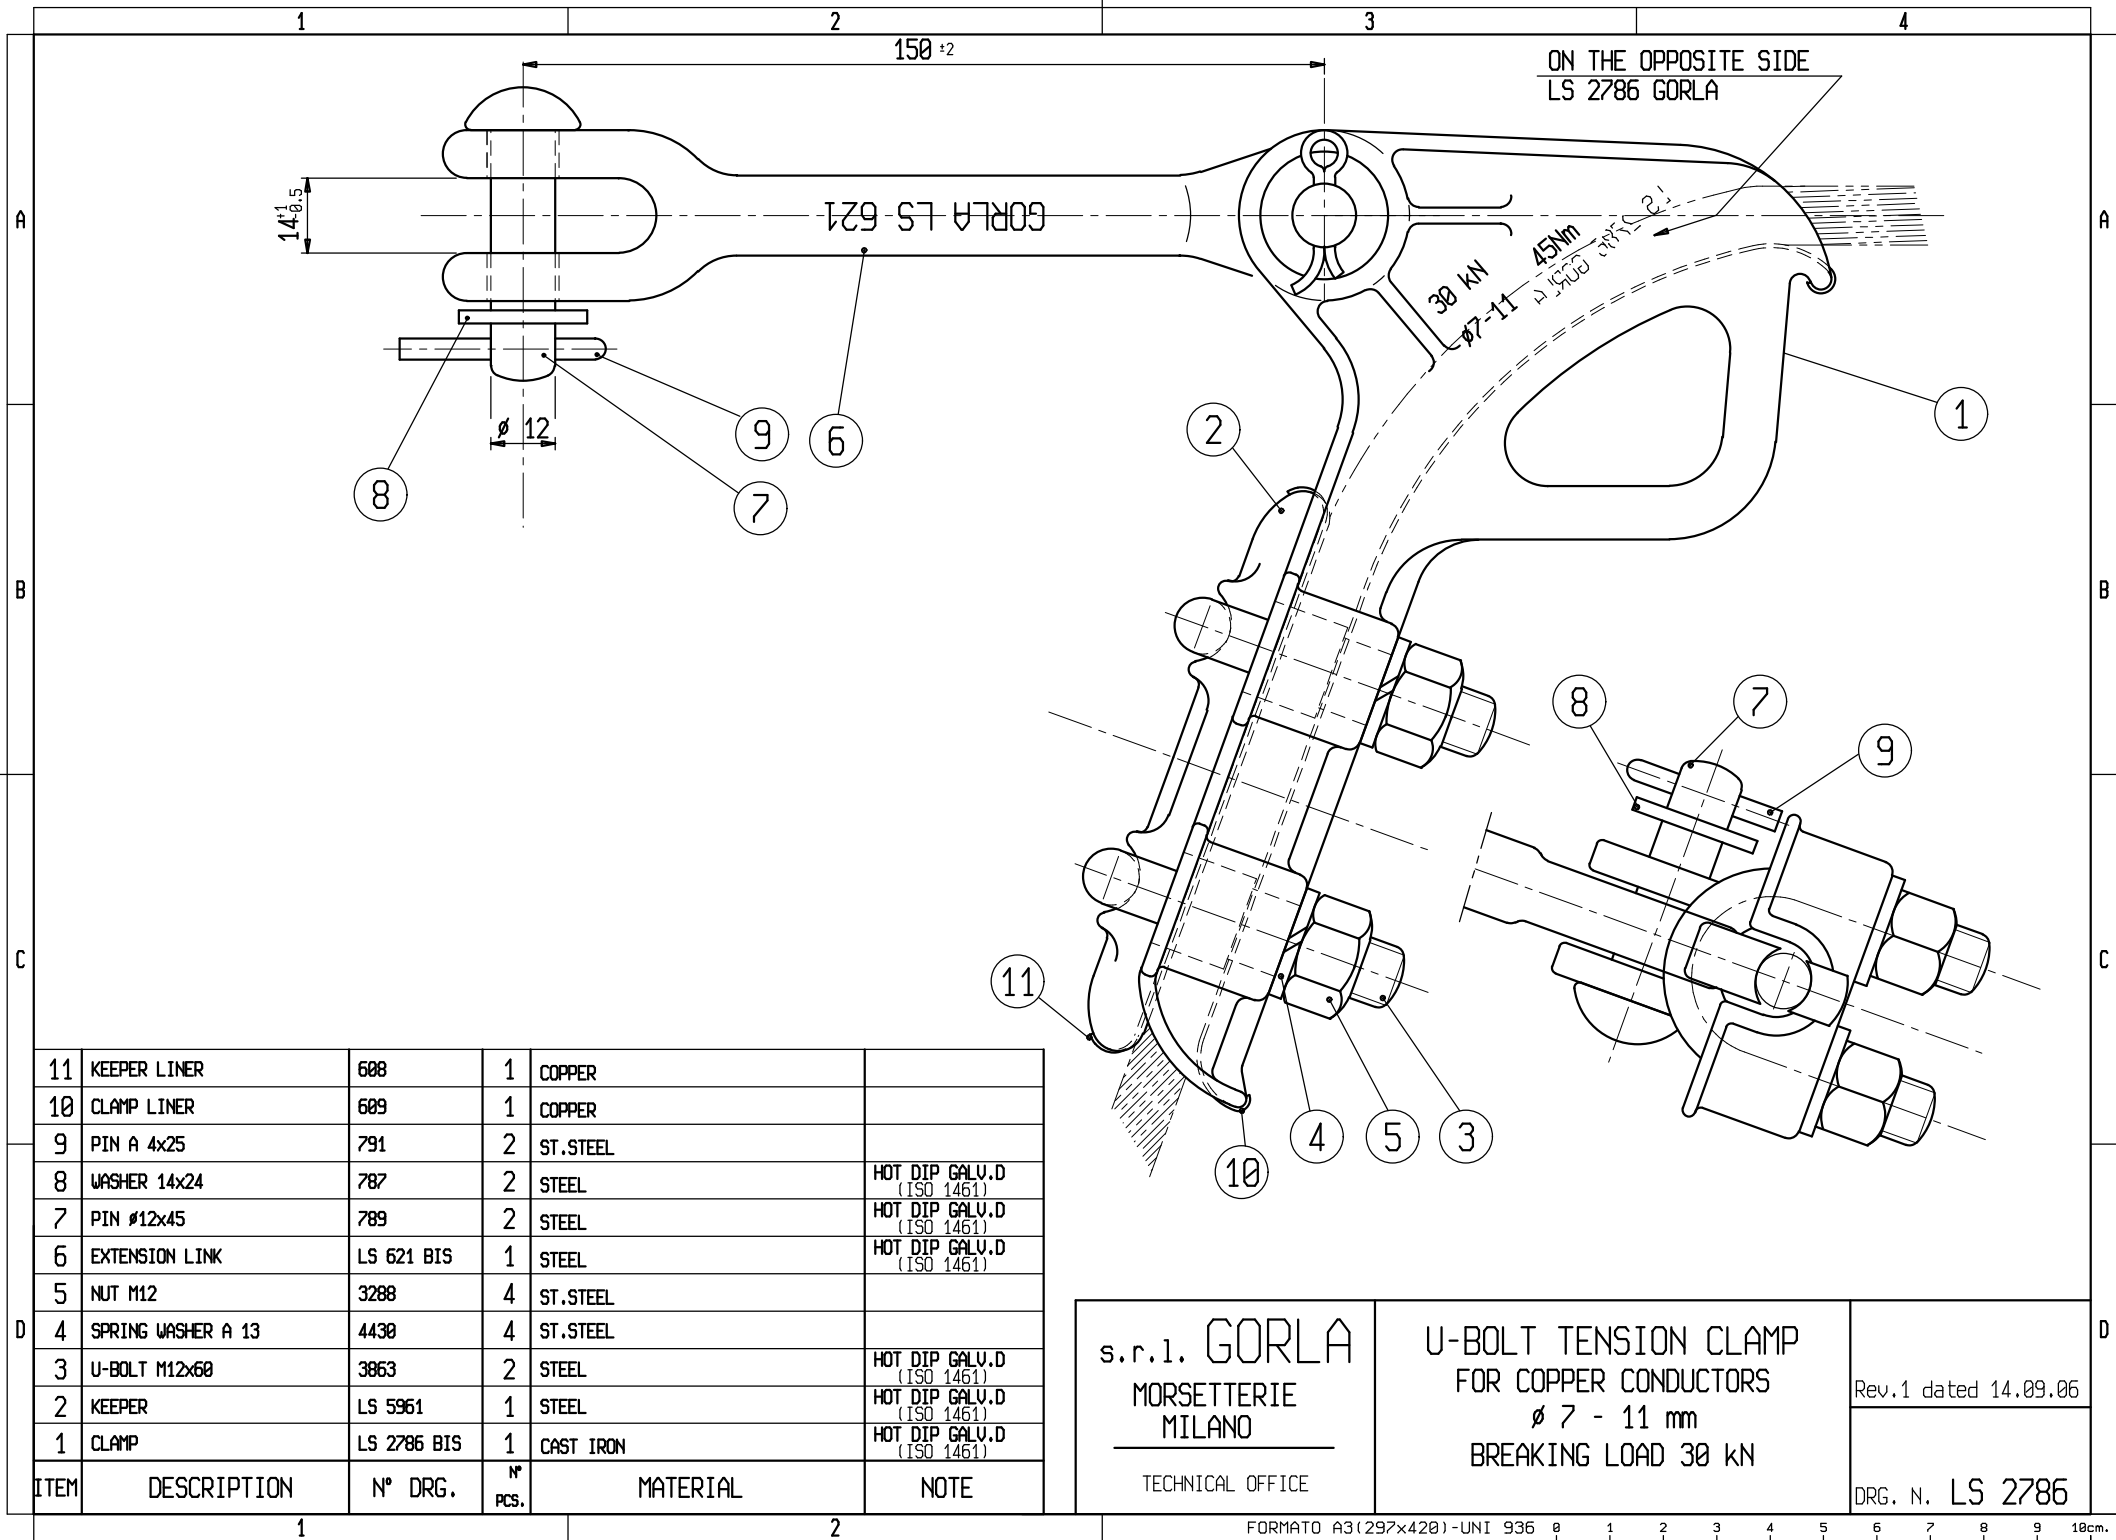

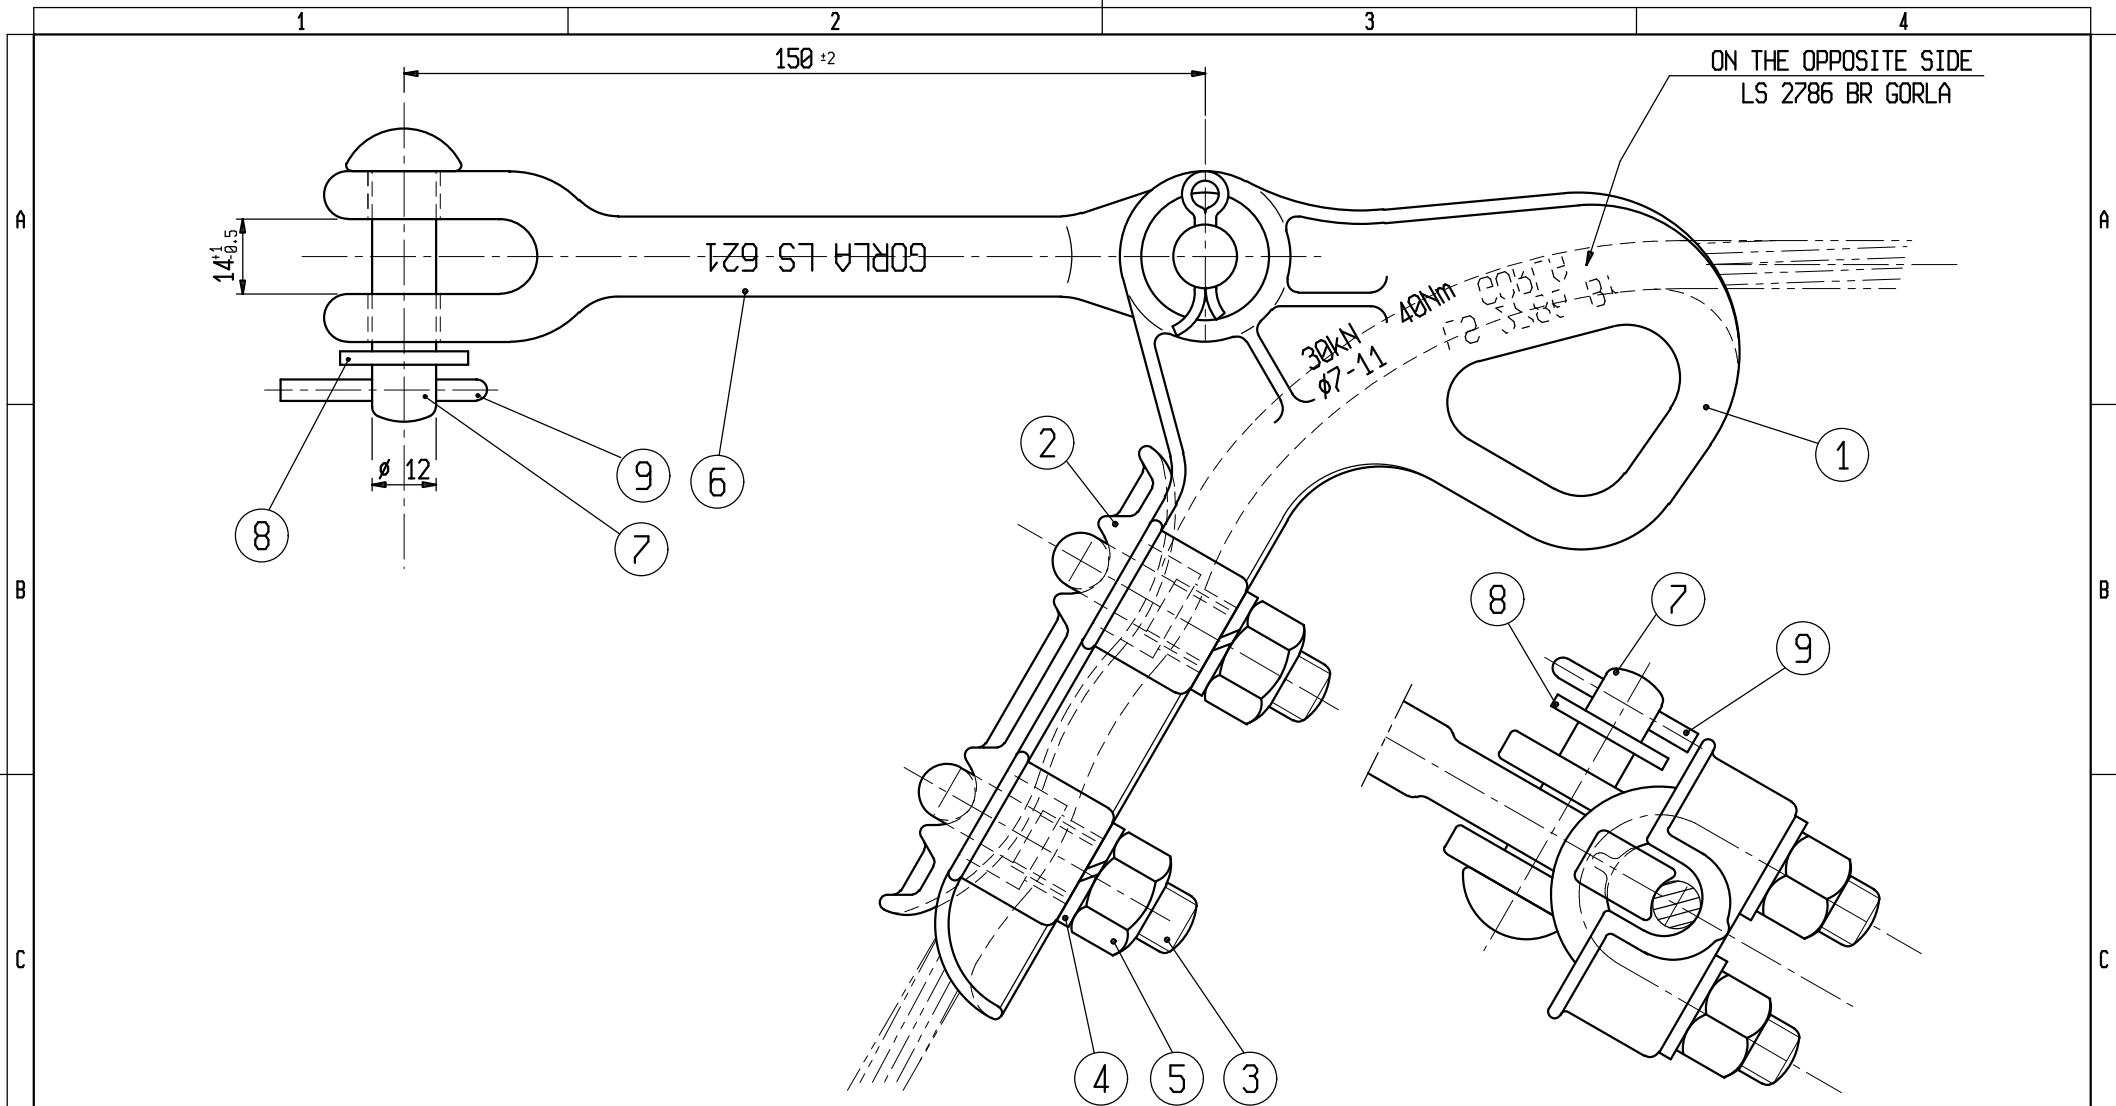


9	PIN A 4x25	791	2	ST.STEEL	
8	WASHER 13x24	5935	2	ST.STEEL	
7	PIN Ø12x45	789	2	STEEL	HOT DIP GALV.D (ISO 1461)
6	EXTENSION LINK	LS 621 BIS	1	STEEL	HOT DIP GALV.D (ISO 1461)
5	NUT M12	3288	4	ST.STEEL	
4	SPRING WASHER A 13	4430	4	ST.STEEL	
3	U-BOLT M12x60	3863 INO	2	ST.STEEL	
2	KEEPER	LS 1299 Br	1	CU ALLOY	
1	CLAMP	LS 2786 Br	1	CU ALLOY	
ITEM	DESCRIPTION	N° DRG.	N° PCS.	MATERIAL	NOTE

s.r.l. GORLA
MORSETTERIE
MILANO
TECHNICAL OFFICE



U-BOLT TENSION CLAMP
FOR COPPER CONDUCTORS
Ø 7 - 11 mm
BREAKING LOAD 30 kN

Rev.1 dated 14.09.06

DRG. N. LS 2786Br



SECTION Y-Y

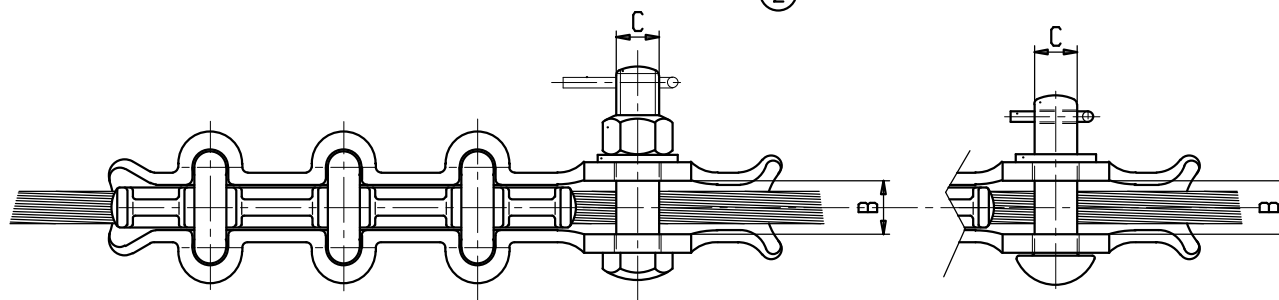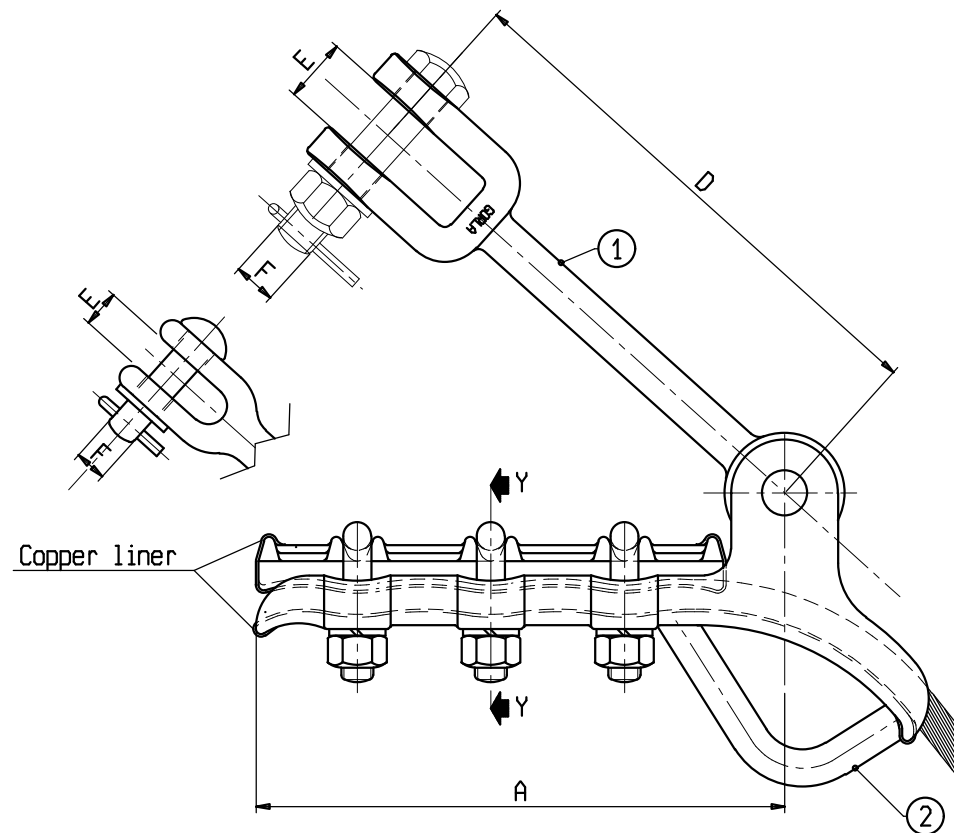

Material: Hot dip galvanized steel.

X	A	B	C	D	E	F	①	②	CR [kN]
LS 2511GCB	200	24	M16	-	-	-	-	-	60
LS 2511GCP	200	24	M16	200	24	M16	LS1170200	-	60
LS 2511GCP16	200	24	M16	200	24	M16	LS1170200	LS6073	60
LS2511GCP11	200	24	Ø 16	150	14	Ø 12	LS 622	LS6073	50
LS2511GCP11S	200	24	Ø 16	150	14	Ø 12	LS 622	-	50
LS 2511CGC	200	24	Ø 16	-	-	-	-	-	60

s.r.l. GORLA
MORSETTERIE
MILANO
TECHNICAL OFFICE

TENSION CLAMPS
WITH 3 U-BOLTS
FOR Cu CONDUCTORS
Ø 6 - 16,5 mm

SCALE	
DRAWN	DATE
APPROVED	DATE
DRG. N. AT41/Cu/X	