

s.r.l. GORLA
MORSETTERIE
MILANO

TECHNICAL OFFICE

PARALLEL GROOVE CLAMP
WITH 2 BOLTS
FOR ACSR, AAC and AAAC CONDUCTORS
AND GROUND WIRES

DRG. N. 01/LR/X


SCALE

DRAWN

DATE

APPROVED

DATE

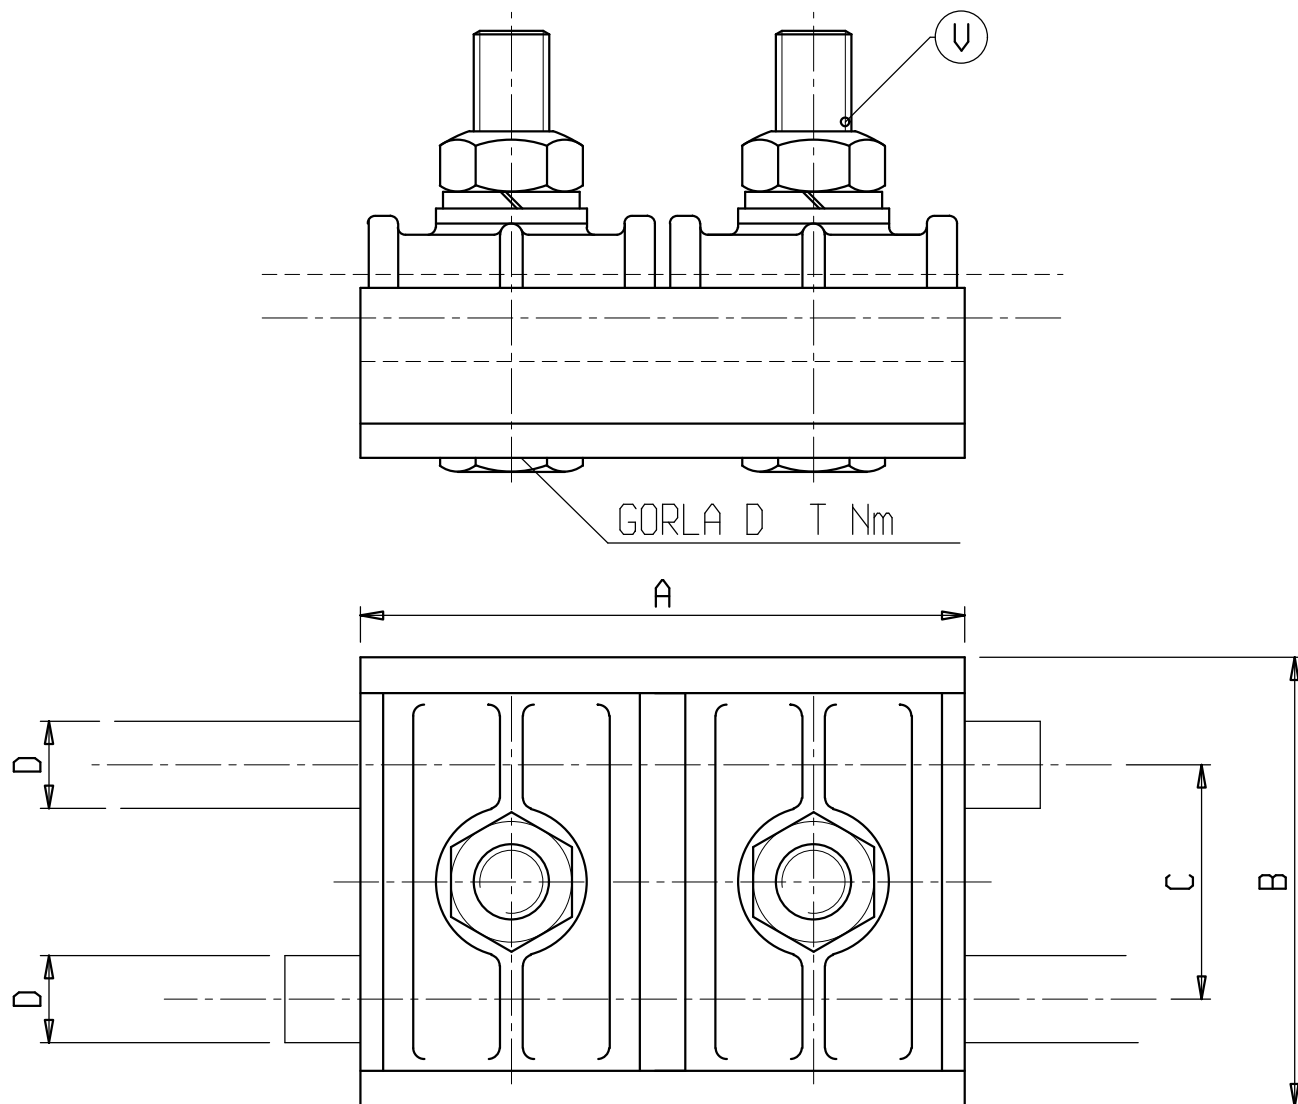

Material: Aluminium alloy
Bolts: Stainless steel

X	Ø COND.	A	B	C	T	U	X	Ø COND.	A	B	C	T	U
	D												
LR 3406	2 - 4	40	26	12	10	M6	LR 2672	19 - 23	90	80	40	40	M12
LR 3407	4 - 6	50	38	19	20	M8							
LR 3408	6 - 8	65	42	21	30	M10							
LR 3409	8 - 10	65	46	23	30	M10							
LR 3410	10 - 12	68	50	24	30	M10							
LR 3411	12 - 16	80	60	31	40	M12							
LR 3412	16 - 19	90	70	35	40	M12							


s.r.l. GORLA
MORSETTERIE
MILANO

TECHNICAL OFFICE

PARALLEL GROOVE CLAMP
WITH 2 BOLTS
FOR A1 CONDUCTOR
(ANTI-SPARKLING)

DRG. N. 04/LR/X

Rev.5 dated 16.04.21

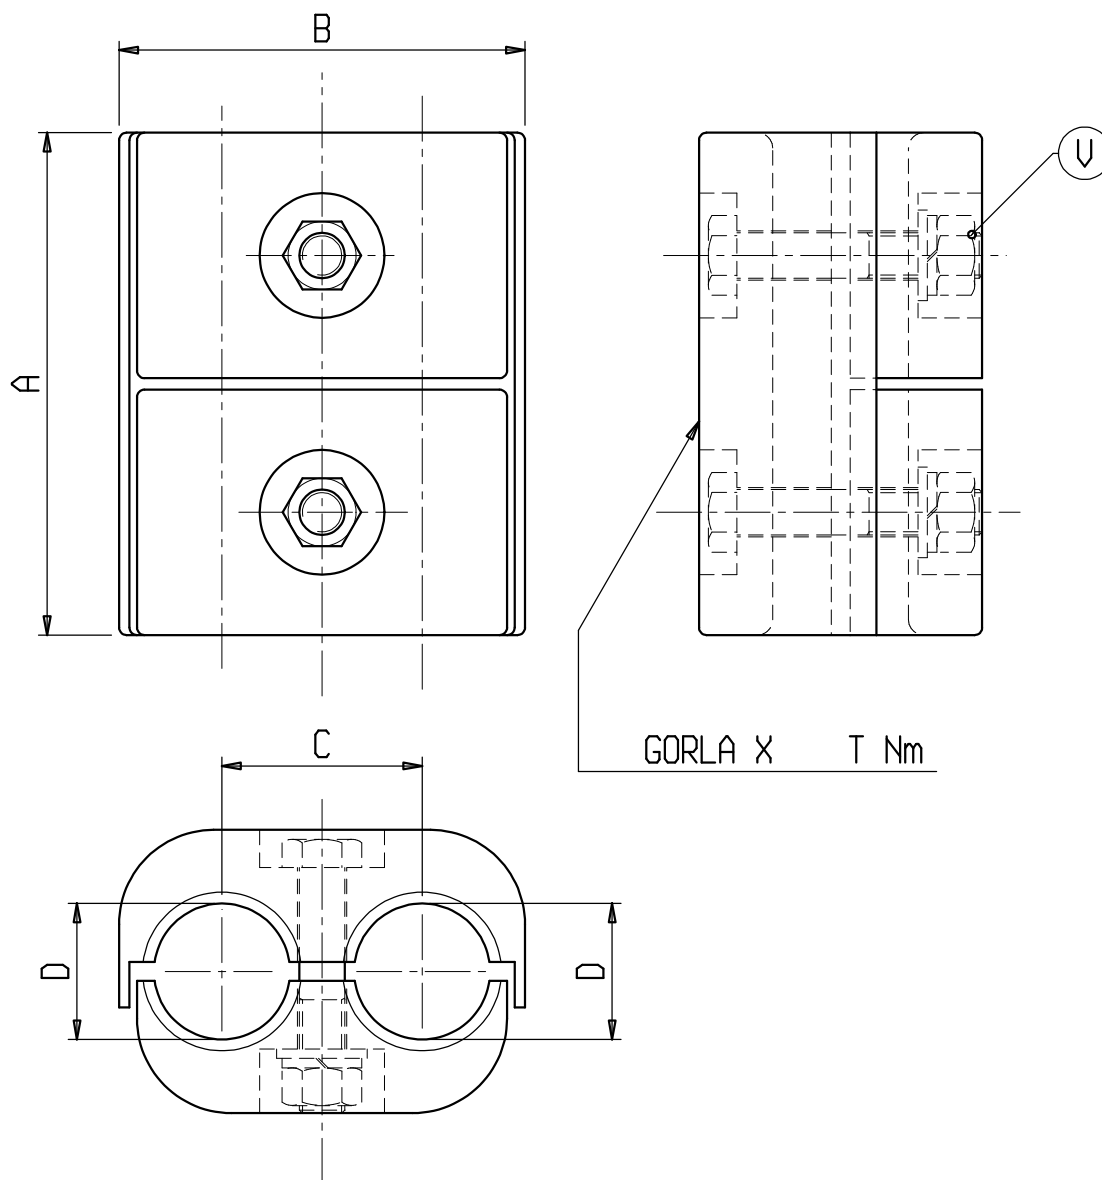

Material: Aluminium alloy
Bolts: Stainless steel

X	Ø COND.	A	B	C	T	U	X	Ø COND.	A	B	C	T	U
	D							D					
LR6444127	12-13	133	110	53	40	M12	LR6444269	26,9	133	110	53	40	M12
LR64441316	13-16	133	110	53	40	M12	LR6444293	29,3	133	110	53	40	M12
LR64441619	16-19	133	110	53	40	M12							
LR6444	19-23	133	110	53	40	M12							


s.r.l. GORLA
MORSETTERIE
MILANO

TECHNICAL OFFICE

PARALLEL GROOVE CLAMP
WITH 2 BOLTS
FOR A1 CONDUCTOR
(ANTI-SPARKLING)

DRG. N. 04E/LR/X

Rev.6 dated 29.03.22

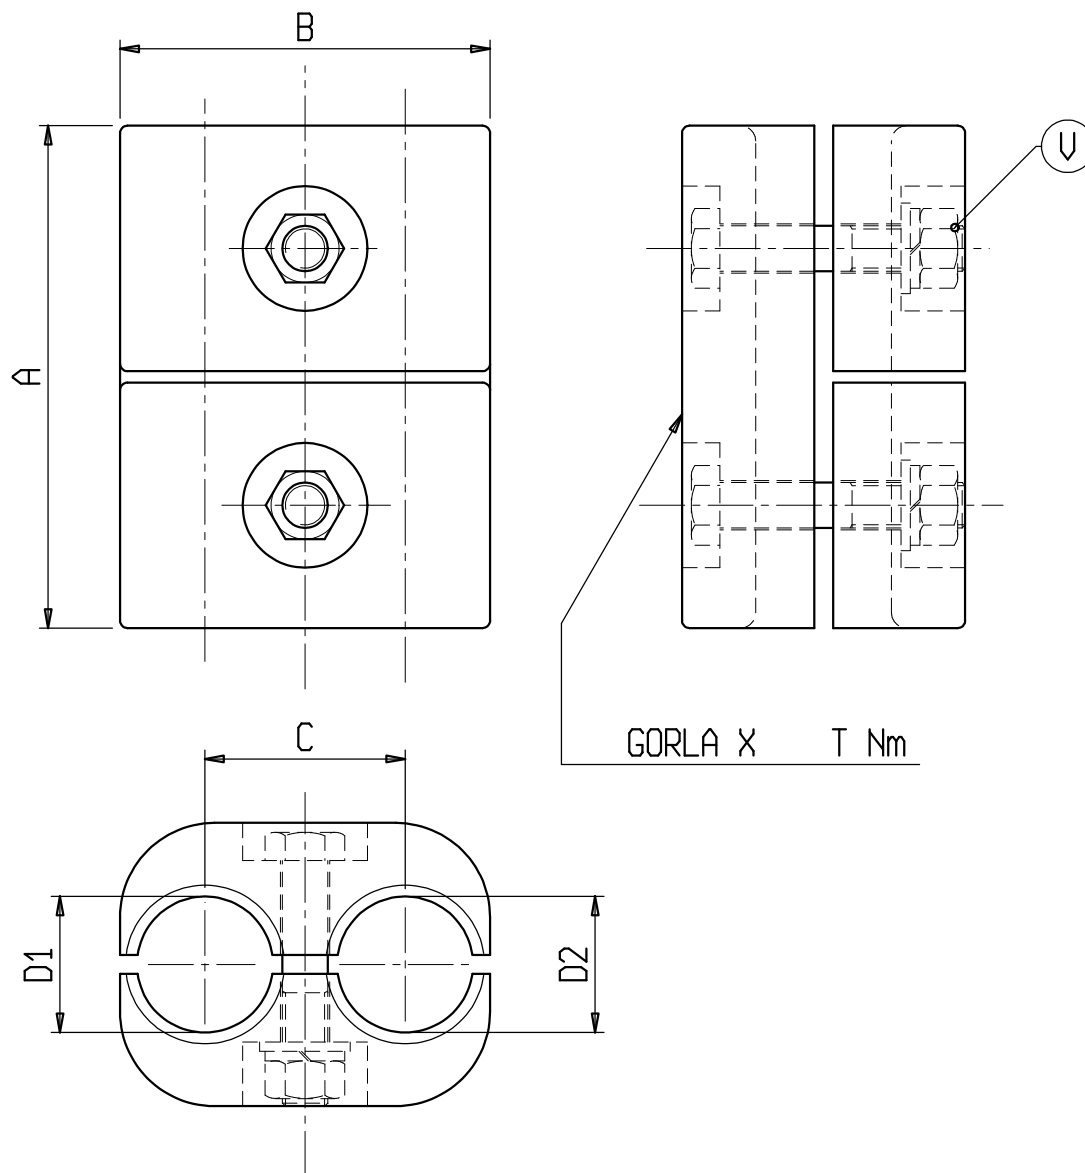

Material: Aluminium alloy

Bolts: Stainless steel

X	Ø COND.		A	B	C	T	U	X	Ø COND.		A	B	C	T	U
	D1	D2							D1	D2					
LR6336193836	19,38	36	133	98	53	40	M12	LR6338	31,5	36	133	98	53	40	M12
LR6336	22,8	36	133	98	53	40	M12	LR6340	36	36	133	98	53	40	M12
LR6336269	26,9	36	133	98	53	40	M12	LR1348	40,5	40,5	133	118	58	40	M12
LR6688	31,5	31,5	133	98	53	40	M12	LR1348411	41,1	41,1	133	118	58	40	M12


s.r.l. GORLA
MORSETTERIE
MILANO

TECHNICAL OFFICE

PARALLEL GROOVE CLAMP
WITH 2 BOLTS
FOR DIFFERENT A1 CONDUCTOR
(ANTI-SPARKLING)

DRG. N. 04D/LR/X

Rev.7 dated 28.03.22

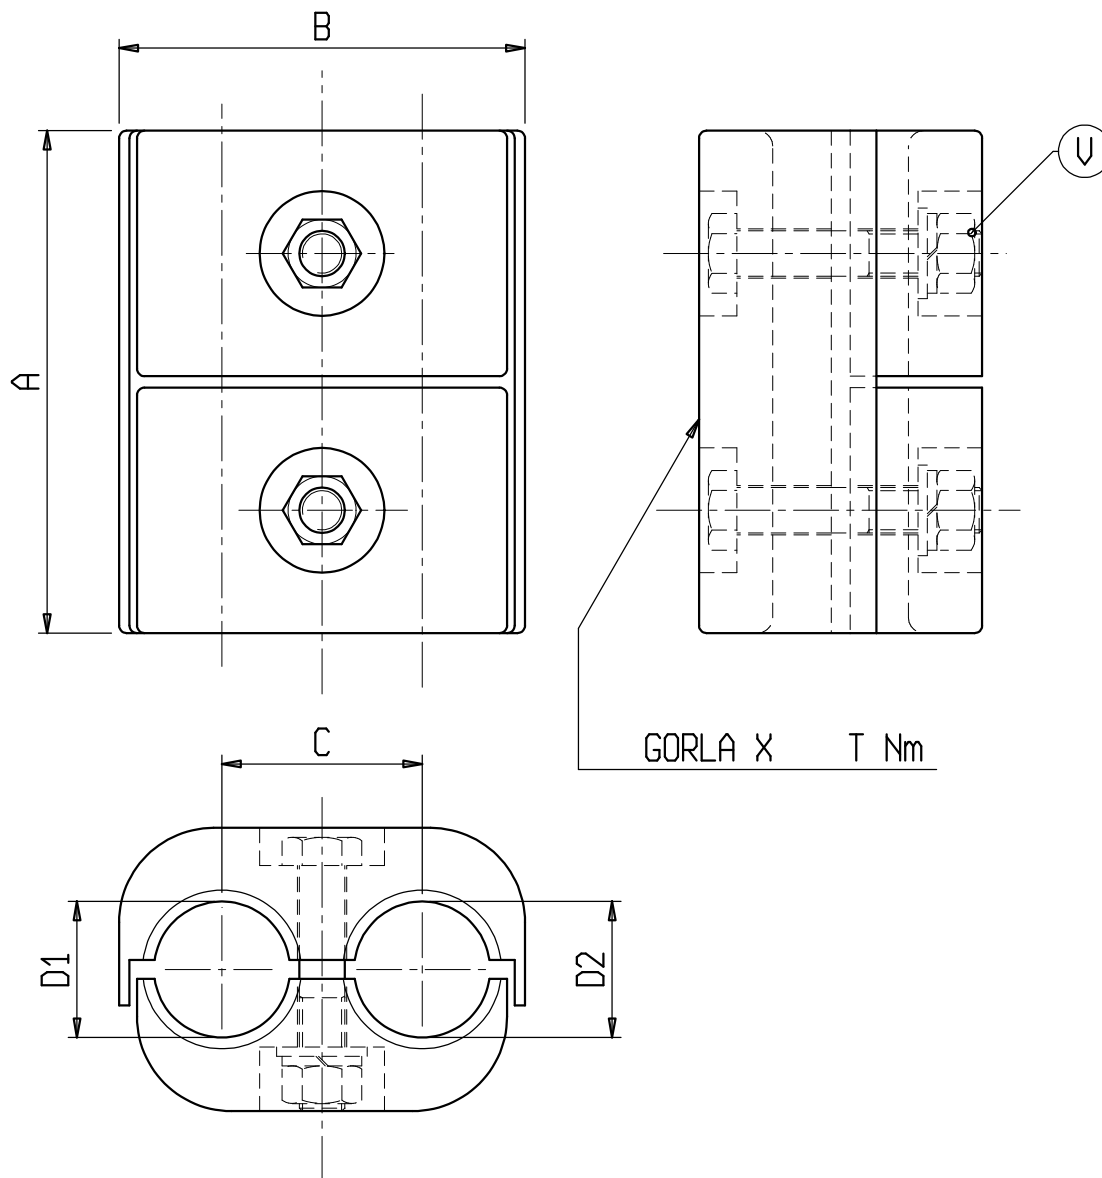

Material: Aluminium alloy


Bolts: Stainless steel

X	Ø COND.		A	B	C	T	U	X	Ø COND.		A	B	C	T	U
	D1	D2							D1	D2					
LR1704D	12-16	36,0	133	110	53	40	M12	LR644421315	21,0	31,5	133	110	53	40	M12
LR6444160269	16,02	26,9	133	110	53	40	M12	LR6444228269	22,8	26,9	133	110	53	40	M12
LR64441821	18,0	21,0	133	110	53	40	M12	LR6444315	22,8	31,5	133	110	53	40	M12
LR6444190269	19,02	26,9	133	110	53	40	M12	LR6444269315	31,5	26,9	133	110	53	40	M12
LR6444190315	19,02	31,5	133	110	53	40	M12								
LR64442124	21,0	24,0	133	110	53	40	M12								

TECHNICAL OFFICE

DRG. N.04DB/LR/X

Rev.7 dated 28.03.22



Material: 1 and 2 Aluminium alloy; 3 Elettrocupal
Bolts: Stainless steel

[illegible]